

# SOLID



- Full platform provides excellent stability
- Durable welded construction
- Anti-slip, high traction surface
- Accommodates wheelchairs and scooters with various wheel configurations
- Safety DVD and steel security pins included
- This ramp has been tested at a 3X safety factor

*Custom widths are available. Give your specifications to your local PVI retailer!*

LIMITED **LIFETIME** WARRANTY

| Item Number | Length | Width | Weight  | Capacity* |
|-------------|--------|-------|---------|-----------|
| SL330       | 3'     | 30"   | 15 lbs. | 800 lbs.  |
| SL336       | 3'     | 36"   | 18 lbs. | 800 lbs.  |
| SL430       | 4'     | 30"   | 20 lbs. | 800 lbs.  |
| SL436       | 4'     | 36"   | 23 lbs. | 800 lbs.  |
| SL530       | 5'     | 30"   | 25 lbs. | 800 lbs.  |
| SL536       | 5'     | 36"   | 30 lbs. | 800 lbs.  |

\* Maximum ramp capacity: 400 lbs. (one axle) – 800 lbs. (two axles).

# ELEV8®


LIMITED **LIFETIME** WARRANTY



- Designed for doorways that swing in or out
- Adjusts to a range of threshold rises for a perfect fit
- Durable welded construction
- Slip resistant grooved aluminum
- Accommodates wheelchairs and scooters with various wheel configurations
- Aligns directly against the door threshold up to 6"

**ELEV8**

*The Ramp with Infinite Heights*

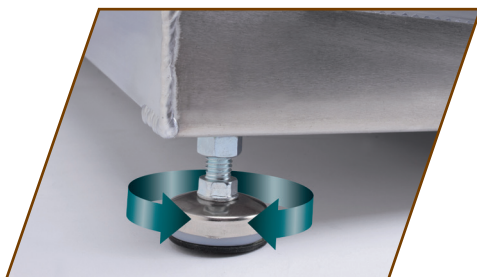

Adjustable Feet Provide a Complete Range of Sturdy Heights

| Item Number | Length | Width | Threshold Height | Weight  | Capacity* |
|-------------|--------|-------|------------------|---------|-----------|
| ATH1232     | 12"    | 32"   | 1" - 2"          | 6 lbs.  | 800 lbs.  |
| ATH1236     | 12"    | 36"   | 1" - 2"          | 8 lbs.  | 800 lbs.  |
| ATH2432     | 24"    | 32"   | 2" - 3½"         | 12 lbs. | 800 lbs.  |
| ATH2436     | 24"    | 36"   | 2" - 3½"         | 14 lbs. | 800 lbs.  |
| ATH3632     | 36"    | 32"   | 3½" - 5"         | 19 lbs. | 800 lbs.  |
| ATH3636     | 36"    | 36"   | 3½" - 5"         | 21 lbs. | 800 lbs.  |
| ATH4832     | 48"    | 32"   | 4" - 6"          | 26 lbs. | 800 lbs.  |
| ATH4836     | 48"    | 36"   | 4" - 6"          | 28 lbs. | 800 lbs.  |

\* Maximum ramp capacity: 400 lbs. (one axle) – 800 lbs. (two axles).